

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/006527 A1

(51) International Patent Classification⁷: **H04L 27/38**

(21) International Application Number:
PCT/SE2002/001324

(22) International Filing Date: 3 July 2002 (03.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): TELE-
FONAKTIEBOLAGET LM ERICSSON (publ)
[SE/SE]; S-126 25 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WEINHOLT, Dan,
Rutger [SE/SE]; Enskärsgatan 15, S-421 60 Västra
Frölunda (SE).


Published:

— with international search report

(74) Agent: ERICSSON AB; Patent Unit West, S-431 84 Möl-
ndal (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NOISE BQLQNCED QAM DETECTION

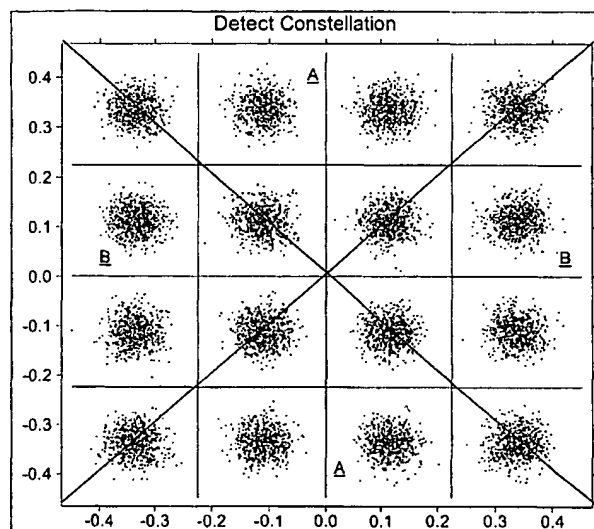

(57) Abstract: A method of demodulating digital data using M'ary QAM has been disclosed, comprising the steps of detecting a complex symbol vector D, establishing within which reference symbol boundaries the detected symbol vector D falls, the given reference symbol boundaries being associated with a complex reference vector R. Quadrature components (E_I and E_Q) of an error vector (E) constituting the difference between the detected vector D and the associated reference vector R are found and an error control signal (E') as feed back signal in the demodulation stage is approximated. The influence of thermal noise in the receiver stage has been limited by a weighting and/or by noise balancing.

WO 2004/006527 A1

BEST AVAILABLE COPY

Noise balanced QAM detectionField of the invention

5

The present invention relates to principles of phase modulation coding and decoding, which may be utilised in various types of telecommunication systems. The invention is especially applicable for radio communication systems.

10 Background of the invention

A commonly used principle for transmitting data over a radio channel and for overcoming the signal rate limitation of binary sequence signalling is to make use of four or more unique symbols. Thereby, the bit rate can exceed the maximum signal rate (in bits/s) corresponding to double the pass-band (in Hz) as given by the Nyquist theorem.

Quadrature phase shift keying (QPSK) also denoted 4-state quadrature amplitude modulation (4-QAM) involves that two-bit words are coded into four discrete symbols. These symbols can be represented as signal vectors in the complex plane having constant amplitude but four distinct phase values in relation to a reference signal. Detection is carried out by establishing to which quadrant in the complex plane the received signal can be referred.

If a higher modulation order is used, the bit rate can be increased further. However, higher requirements are inflicted on the detection stage since it becomes more difficult to distinguish the individual symbols from one another, as they appear closer in the complex plane. The deterioration of the signal as transmitted over a given media also constitutes a limitation to the possible number of symbols being used.

Higher order keying is commonly referred to as M'ary QAM, where $M = 2^N$ refers to the number of discrete symbols being available, whereby N bits can be transmitted per symbol. M'ary QAM is also referred to as M'ary APK (amplitude phase shift keying), as both the amplitude and phase may vary for individual symbols.

Figure 1 shows a conventional transmitter and figure 2 shows a conventional receiver.

The transmitter unit comprises a data buffer 1, a mapper 2, baseband filtering unit 3, intermediate frequency (IF) oscillator 6, phase divider 5, adders 7, and summer 4 from which a radio frequency (RF) signal is transmitted.

- 5 Data stored temporarily in buffer 1 is conveyed to the mapper 2 in accordance with the rate data can be transmitted over the radio interface. The data, which can be seen as a binary bit serial string, is partitioned into symbols by the mapper 2 having an I component and Q component in the complex plane as explained above.
- 10 The receiver, on the other hand, decodes I and Q components multiplying the incoming signal (RF) with 90 degree phase skewed signals provided by signal oscillator IF12 from divider D11. The signal of IF 12 is typically rendered coherent by means of a carrier recovery PLL (phase locked loop) with the carrier signal from IF 6, such that the RF signal, after being filtered in respective filters 9 and 10, can be decoded back into the complex
- 15 plane. An error signal 16 corresponding to the deviation of the detected symbol value from an expected symbol value is fed into PLL loop back filter 13 adjusting IF generator IF 12.

- Fig. 3 and 4 show a conventional scheme for transmitting data. A frame alignment word
- 20 F1 consisting of a predetermined sequence of symbols functions as a reference for subsequent frames of traffic data B1, B2..BN-1. For example, the frame-word may have a length of 8 bits. After transmission of a fixed period of frames, the frame alignment word is repeated. Via a frame-aligner 15, in which the predetermined sequence is recovered, the demodulator, can identify the individual frame position for each frame.

25

As is shown in fig. 4', the frame alignment word may comprise a single pilot signal P, which is discernible from the remaining traffic carrying symbols T.

- An error signal vector E corresponding to the deviation of the detected symbol value D
- 30 from an expected reference symbol value R is detected in de-mapper 14 and is fed into PLL loop back filter 13, which deviates a control value E', also denoted deviated error signal. For instance the angle ϕ between vectors for points D and R, can be calculated and used as error control signal E'.

- 35 The latter signal is used to adjust IF generator IF 12, so that the phase of signal from IF12 is rendered coherent with the signal of IF6.

Additive noise, which consists mainly of thermal noise in the receiving signal, will typically be transferred to the phase detector output. The noise part of the received signal constitutes a constant area around the transmitted constellation symbol, as the noise
 5 part is independent of the given symbol.

All QAM schemes larger than 4 have constellations for which the envelope varies for the individual symbols. Hence, if the error signal E is used directly and unprocessed for QAM schemes larger than 4, the noise transfer from symbols with a small envelope, G,
 10 will be much larger than symbols with a large envelope, H. This relation has been indicated in fig. 3, which discloses detected symbols for a 16QAM constellation under the influence of thermal noise.

Therefore, a need has arisen as to compensate for noise contributions.
 15

The optimum with respect to noise transfer would be to "equalise" the phase detector with regard to the envelope, hence to multiply the detected phase error with the envelope of the signal, as expressed below:

20 I:
$$E' = \varphi \cdot |D|$$

where D is the detected signal and φ is the angle between the detected signal and the decided symbol reference R (square centre). Please confer fig. 4.

25 However, the above calculation requires many programming instructions and is therefore not suitable for some applications.

A deviated signal, which is more easily calculated, is given by the expression:

30 II:
$$E' = D_Q \cdot R_I - D_I \cdot R_Q$$

where D is the detected signal and R is the decided symbol.

In the latter case, the noise will get a "square" dependency related to the envelope of the
 35 signal. In fig. 5 various lines have been shown for given values of control signals E' for relation II above.

In order to equalise the detected error with regard to noise, the error should be divided by the actual envelope. Hence, the following expression may be used:

5 III:
$$E' = \frac{D - Q \cdot R - I - D - I \cdot R - Q}{\sqrt{(D - Q)^2 + (D - I)^2}}$$

However, also the two above methods of noise balancing require relatively complex algorithms, which then again require extensive processing power in the receiver stage.

- 10 Prior art document US-5 796 786 shows a phase error detection method in which a phase error value for the received data is obtained by subtracting the decided I-channel data and multiplying the sign of the difference by the difference itself and applying a weighting function to the phase error value. This signal is used for phase correction of received data. The weighting function is applied to reduce the wrong detection of a
- 15 phase error caused by a decision error possibly generated in an adjacent error between symbols.

Summary of the invention

20

It is a first object of the invention to set forth a method, which provides for a robust high bit rate data transmission, which is bandwidth efficient, and which lessens requirements on the hardware.

- 25 This object has been achieved by the subject matter specified in claims 1 and 4 respectively.

It is a further object to set forth a method that provides noise balance with respect to the envelope of the QAM signal.

30

This object has been achieved by the subject matter defined by claim 1.

It is a further object to set forth a method, which provides suppression of noise, related to QAM decision thresholds.

35

This object has been achieved by claim 4.

More advantages will appear from the following detailed description of preferred embodiments of the invention.

5

Brief description of the drawings

- Fig. 1 shows a known transmitter,
10
fig. 2 shows a known receiver,

fig. 3 shows a typical known frame timing diagram,

15
fig. 4 shows a detail of fig. 3,

fig. 4' shows another known frame diagram,

fig. 5 shows thermal noise in a 16QAM-keying constellation,
20
fig. 6 shows details relating to an error vector E,

fig. 7 shows curves for various derived control error values E' according to a known method in a 64-QAM system,
25
fig. 8 shows an exemplary quadrant error correction scheme according to a first embodiment according to the invention,

fig. 9 shows an exemplary octant error correction scheme according to an alternative
30
first embodiment according to the invention,

fig. 10 shows an exemplary receiver for parabolic error weighting according to a second embodiment of the invention.

35
fig. 11 shows an exemplary first parabolic error weighting function according to the second embodiment of the invention,

fig. 12 shows an exemplary second parabolic error weighting function according to the second embodiment of the invention, and

- 5 fig. 13 shows an exemplary 128-QAm scheme according to a third embodiment of the invention.

Detailed description of a preferred embodiment of the invention

10

According to a first preferred embodiment of the invention, noise equalisation is achieved by directly using the quadrature error components, E_Q and E_I , which are independent of the signal envelope.

- 15 According to a first embodiment, as shown in fig. 8, the constellation area is divided into 4 sectors for which the deviated error control signal E' is determined as follows in dependency of the detected symbol vector D :

IV: for sector A - $|D_Q| \geq |D_I|$: $E' \equiv E_I$

20

V: for sector B - $|D_Q| < |D_I|$: $E' \equiv E_Q$

According to a further aspect of the first embodiment, the constellation area is divided by four lines through the origin into 3 sectors, A, B and C, as shown in fig. 9. The definition
25 of these sectors and the deviated error control signal E' in the associated sectors are given as follows:

VI: for sector A - $|D_Q| \geq 2 \cdot |D_I|$: $E' \equiv E_I$

30 VII: for sector B - $|D_Q| < \frac{1}{2} \cdot |D_I|$: $E' \equiv E_Q$

VIII: for sector C (non A, non B): $E' \equiv \frac{E_I + E_Q}{2}$

As appears, for sector A and B surrounding the I and Q axis, one of the orthogonal error components E_I or E_Q is used directly and unprocessed once it is detected to which sector the detected error symbol, D, belongs. For sector C in the "corner areas", the mean value of the orthogonal error components E_I or E_Q is used as deviated error control signal E'.

The deviation of the error control value E' is for instance carried out in the PLL loop back filter 13 of the receiver shown in fig. 2.

It appears that the above steps of comparison and calculation can be easily accomplished by very few programming instructions.

Another noise contributor is related to the thresholds of the QAM decision device, i.e. the symbol detection performed in de-mapper 14. When the detected symbol approaches the square shaped boundaries of size T, for instance shown in fig. 5 and 6, the noise contribution may lead to errors. In those cases where the noise component is larger than the distance to the symbol boundary, the error signal will get a wrong sign that will disturb the PLL tracking heavily.

According to the invention, this effect can be reduced by applying the above weighting function that suppresses the detector output for points close to the boundaries.

The weighting can be accomplished in a number of ways. However, according to the invention it is a basic objective to reduce the sharp transitions in the detector output when the detected signal D approaches the decision boundaries. Known demodulators have a typical "saw-tooth" like shape of the detector vs. phase error response. It is moreover an objective to subdue responses outside the detector boundaries.

According to a preferred second embodiment of the invention the following relation is used for weighting the occurring symbol error:

$$\text{VIII: } WE = E' \left(1 - \frac{2W}{T}\right) \text{ for } -\frac{1}{2}T \leq E' \leq \frac{1}{2}T$$

where T corresponds to the boundary size as indicated in fig. 12 and E' corresponds to deviated control error and $W = \text{Max}\{\text{abs}(E_I); \text{abs}(E_Q)\}$.

In principle, no values of E' will occur outside the above range of $\pm \frac{1}{2}T$ once it has been detected to which symbol boundary E_Q and E_I belongs. Hence one alternative is to render the weighting function zero outside the above interval.

5 IX: $WE = 0 \text{ for } E' < -\frac{1}{2}T \vee \frac{1}{2}T < E'$

Generally, it applies, that the weighted error signal (WE) should approach zero for error signals (E) approaching zero. The weighting function should also produce a positive value for positive values in the area close to zero and a negative value for negative values in the area close to zero. Moreover, the weighting function approaches zero when the error signal vector approaches the symbol boundaries of the detected symbol.

In fig. 10, one embodiment for implementing the above method has been shown, wherein a weighting filter 17 performs the weighting of the derived error control signal E' and provides the feedback weighted control value WE for IF generator IF12. As appears from fig. 10 an optional signal 18 from de-mapper 14 may enable or bar the weighting of some specific symbols.

The above weighting will result in a parabolic shape of the detector vs. phase error response. The error weighting has been illustrated by line 26 in fig. 11.

As appears from fig. 11, the false phase errors, which otherwise would have occurred, if no weighting function were utilised are substantially reduced. Consequently, the possibilities for erroneously adjusting the PLL loop have been reduced.

25 In fig. 12, an alternative weighting function using discrete values has been shown. As appears from the figure the curve shape of the weighted function is similar to the curve-shape of fig. 11. However, a number of discrete values are used for simplicity.

30 As mentioned above it is an objective to subdue responses near the decision boundaries. However, according to a further embodiment of the invention, this only applies for the central symbols in the I/Q plane.

In fig. 13, an exemplary excerpt of a 128-QAM scheme has been shown. Eight outer signalling points 32 in the constellation define corners on a borderline to an outer area 34. If signals are detected in the outer corner area 34, the deviated error control signal is

not weighted, $WE=E'$. On the other hand, if signals fall outside the symbol boundaries along the Q and I axes as indicated by the area 36, the weighting function $WE=0$ is applied. This leads to an improved burst error performance.

- 5 Hence, according to the invention an improved demodulator has been accomplished which lessens errors from occurring and enhances tracking capabilities although noise should occur in the demodulator.

Patent claims

1. Method of demodulating digital data using M'ary QAM, comprising the steps of

5 detecting a complex symbol vector D,

establishing within which reference symbol boundaries the detected symbol vector D falls, the given reference symbol boundaries being associated with a complex reference vector R,

10

establishing quadrature components (E_I and E_Q) of an error vector (E) constituting the difference between the detected vector D and the associated reference vector R, and seeking to approximate an error control signal (E') as feed back signal in the demodulation stage,

15

whereby if the detected symbol vector (D) falls within a first sector (A) in the complex plane surrounding the imaginary axis (Q), the first sector being delimited by at least two lines crossing origin, the first sector being symmetrical with regard to the imaginary axis, approximating the error control signal (E') by the imaginary quadrature component (E_I) of the error vector (E), and

20

whereby if the detected symbol vector (D) falls within a second sector (B) in the complex plane surrounding the real axis (I), the second sector being delimited by at least two lines crossing origin, the second sector being symmetrical with regard to the real axis, approximating the error control signal (E') by the real quadrature component (E_I) of the error vector (E).

25

2. Method of demodulating digital data using M'ary QAM according to claim 1,

30

whereby the first sector is delimited by the area $|D_Q| \geq |D_I|$

and the second sector is delimited by the area $|D_Q| < |D_I|$.

35

3. Method of demodulating digital data using M'ary QAM according to claim 1, whereby

5 the first sector is delimited by the area $|D_Q| \geq 2 \cdot |D_I|$,

the second sector is delimited by the area $|D_Q| < \frac{1}{2} \cdot |D_I|$, and

10 if the detected symbol vector (D) belongs neither to the first sector nor to the second sector, approximating the control error signal (E') by the mean value of the real quadrature component (E_I) and the imaginary quadrature component (E_Q).

- 15 4. Method of demodulating digital data using M'ary QAM, comprising the steps of

detecting a complex symbol vector (D),

20 establishing within which reference symbol boundaries of a given symbol boundary size (T) the detected symbol vector (D) falls, the given reference symbol boundaries being associated with a complex reference vector (R),

25 establishing quadrature components (E_I and E_Q) of an error vector (E) constituting the difference between the detected vector (D) and the associated reference vector (R),

deriving a control error signal (E') from the error vector (E), the control error signal

30 using a weighted error signal (WE) being a function of the derived error signal (E') as a feed-back signal in the demodulation stage, whereby

the weighted error signal (WE)

- approaches zero for error signals (E) approaching zero,

- attains a positive value for positive values close to zero and attains a negative value for negative values close to zero,

- approaches zero when the error signal vector approaches the symbol boundaries of the detected symbol,

5

5. Method according to claim 4, wherein if the error signal vector (E) exceeds the symbol boundaries, the weighted error signal (WE) attains a reduced value or a zero value.

10

6. Method according to claim 5, wherein the error signal is reduced according to

15

$$WE = E' \left(1 - \frac{2W}{T}\right)$$

where E' corresponds to the deviated control error (E') and T corresponds to the symbol boundary size and where $W = \text{Max} \{ \text{abs}(E_I); \text{abs}(E_Q) \}$.

20 7. Method according to any of claims 4 - 6, wherein no weighting is performed for outer corner portions (34) of the M'ary QAM constellation.

8. Method according to claim 7, wherein if the detected signal (D) falls outside the symbol boundaries along the Q and I axes (36), the weighting function $WE=0$ is applied.

25

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 27/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04B, H03L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5796786 A (LEE, M-H), 18 August 1998 (18.08.98), column 10, line 65 - column 11, line 4, figures 5-6C --	4-8
X	US 5684842 A (DAFFARA, F.), 4 November 1997 (04.11.97), column 5, line 54 - column 7, line 10, figure 10	4-8
A	column 3, line 39 - line 64, figure 10 --	1-3
A	US 5519356 A (GREENBERG, C.B.), 21 May 1996 (21.05.96), claim 1, abstract --	1-3

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 April 2003

Date of mailing of the international search report

14-05-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Markus Stålbö /OGU

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4683578 A (BETTS, W.L. ET AL), 28 July 1987 (28.07.87), column 2, line 40 - column 6, line 44, figures 2-4 --	1-3
A	US 5533071 A (KRISHNAMURTHY, G. ET AL), 2 July 1996 (02.07.96), claim 1, abstract --	1-3
A	US 4555790 A (BETTS, W.L. ET AL), 26 November 1985 (26.11.85), figures 1-2, abstract --	1-3
A	MOUAKI BENANI, A. et al. "COMPARISON OF CARRIER RECOVERY TECHNIQUES IN M-QAM DIGITAL COMMUNICATION SYSTEMS". In: 2000 Canadian Conference on Electrical and Computer Engineering, Halifax, NS, Canada, 07-10 March 2000, Vol. 1., pages 73-77, INSPEC Accession Number: 6691171, see the whole document. -- -----	1-3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 02/01324

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Invention I: Claims 1-3 describe a method to approximate an error signal by its imaginary component or its real component depending on in which sector the received signal is detected.

Invention II: Claims 4-8 describe a method to weight an error signal with a weighting function

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5796786	A	18/08/98	CN	1079619 B	20/02/02
				CN	1154027 A	09/07/97
				EP	0769364 A	23/04/97
				JP	9233438 A	05/09/97
				KR	113969 Y	11/04/98
				KR	155900 B	16/11/98
US	5684842	A	04/11/97	CN	1083196 B	17/04/02
				CN	1128923 A	14/08/96
				EP	0692896 A	17/01/96
				FR	2722630 A	19/01/96
				JP	8181732 A	12/07/96
				FR	2733107 A	18/10/96
US	5519356	A	21/05/96	NONE		
US	4683578	A	28/07/87	NONE		
US	5533071	A	02/07/96	CA	2131998 A	18/08/94
				CN	1069472 B	08/08/01
				CN	1102043 A	26/04/95
				EP	0642721 A	15/03/95
				JP	7509828 T	26/10/95
				KR	158719 B	01/12/98
				US	5406587 A	11/04/95
				US	5508748 A	16/04/96
				US	5533070 A	02/07/96
US	4555790	A	26/11/85	WO	9418772 A	18/08/94
				NONE		

1/10

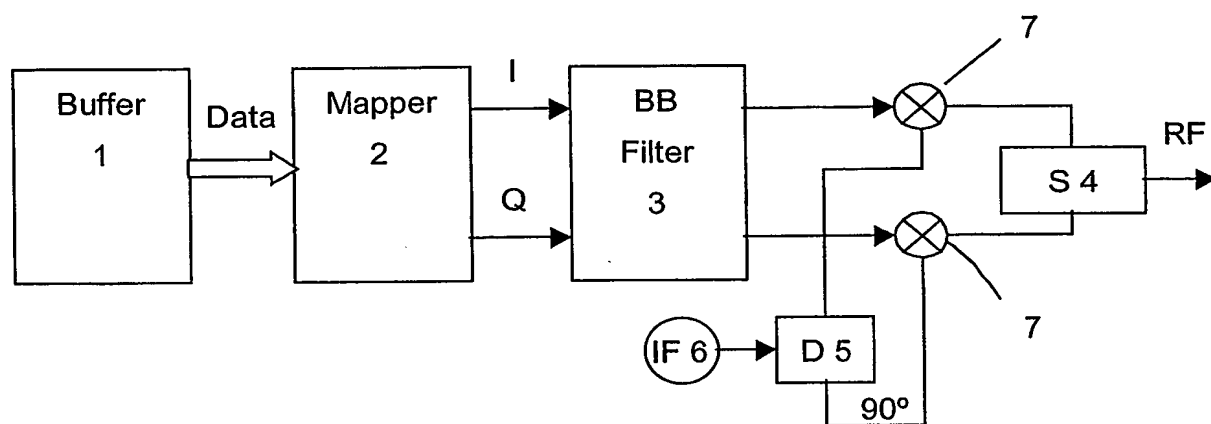


Fig. 1

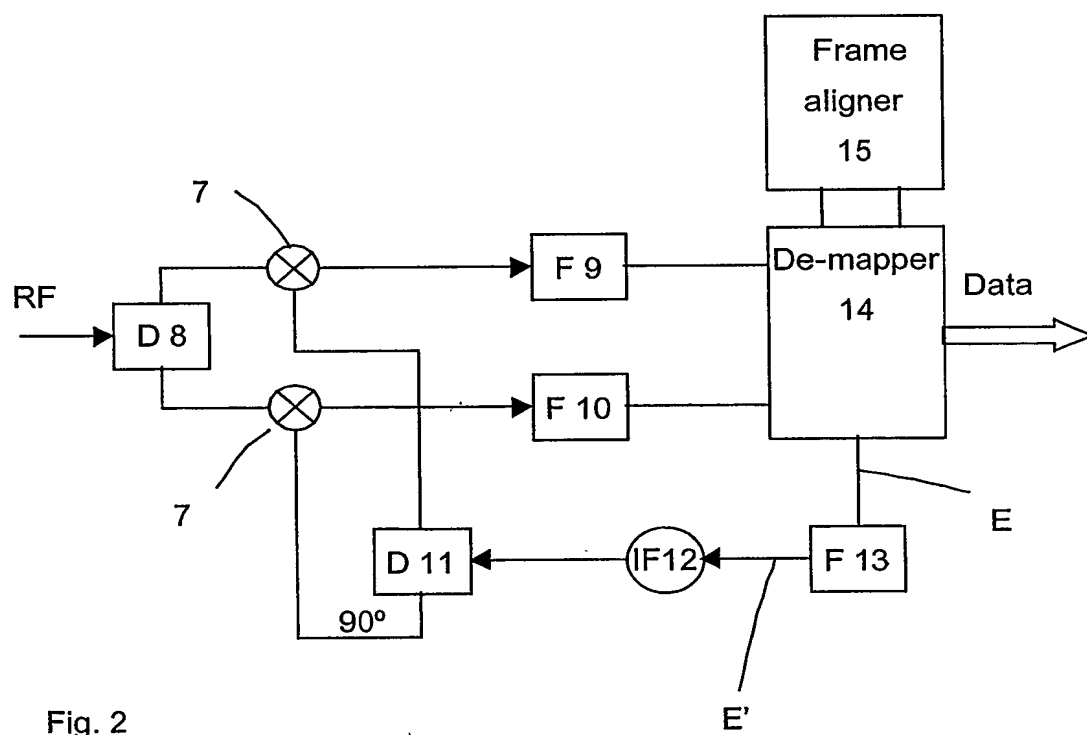


Fig. 2

2/10

FP

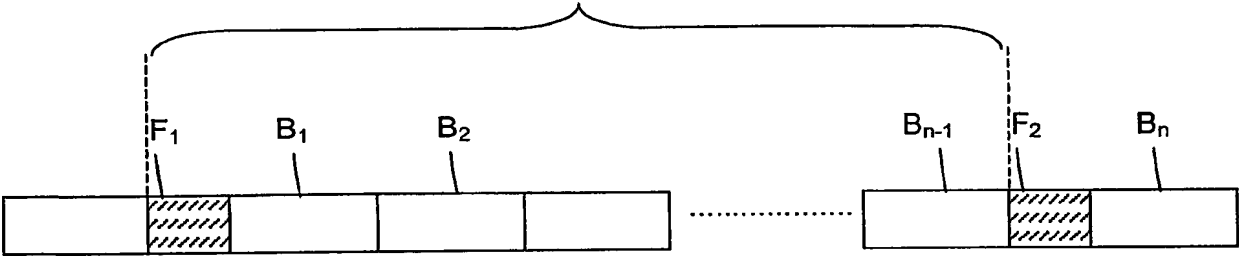


Fig. 3

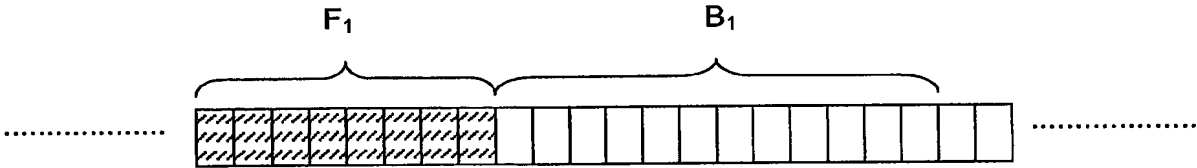


Fig. 4

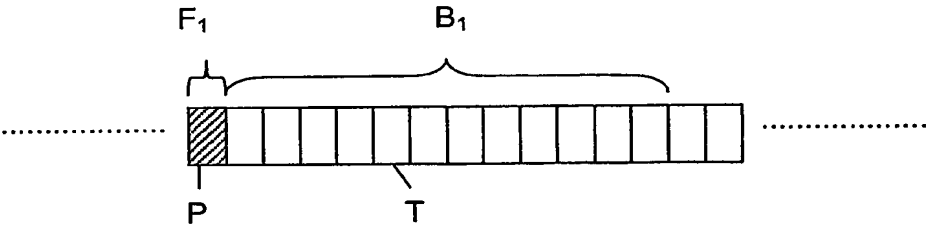


Fig. 4'

3/10

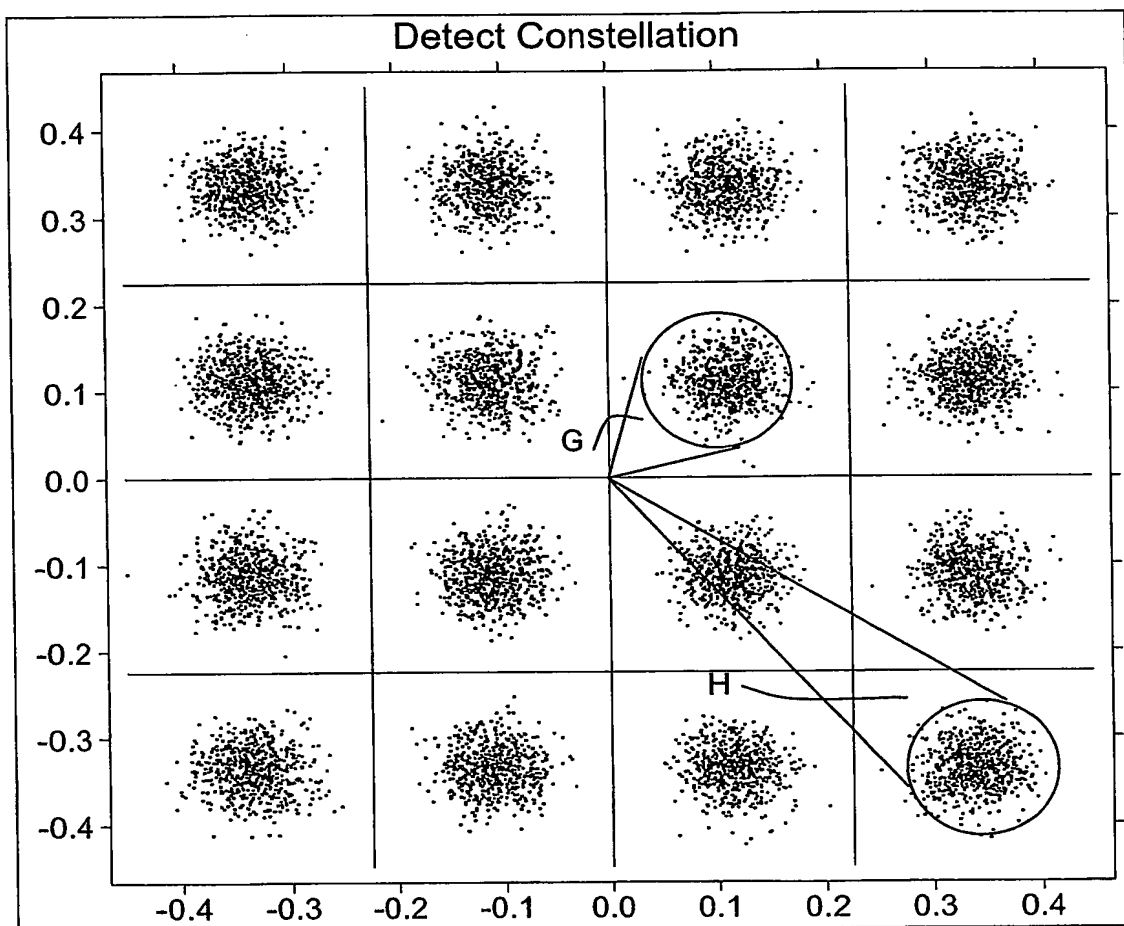


Fig. 5

4/10

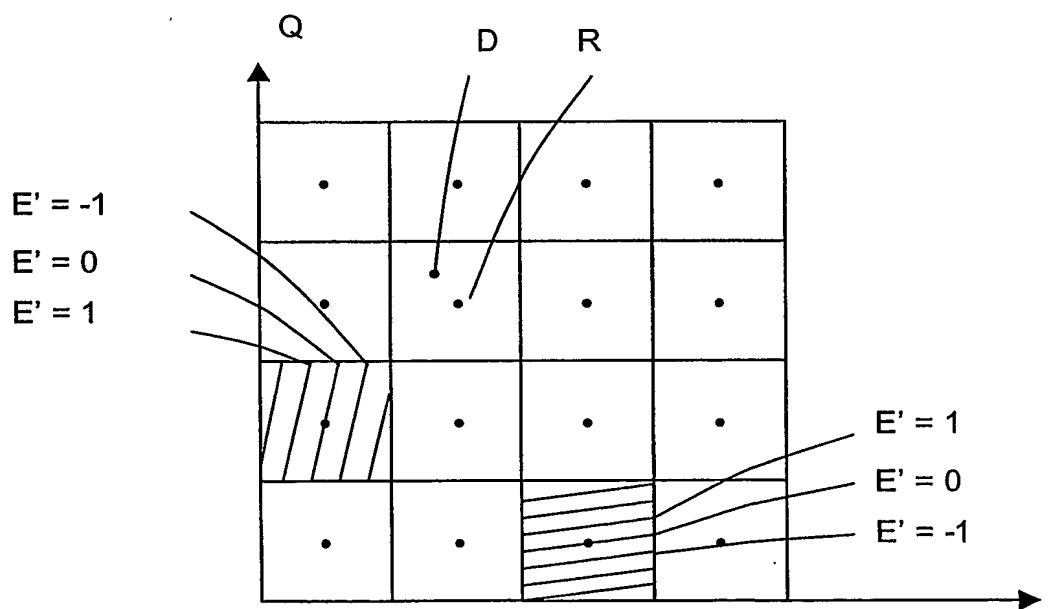
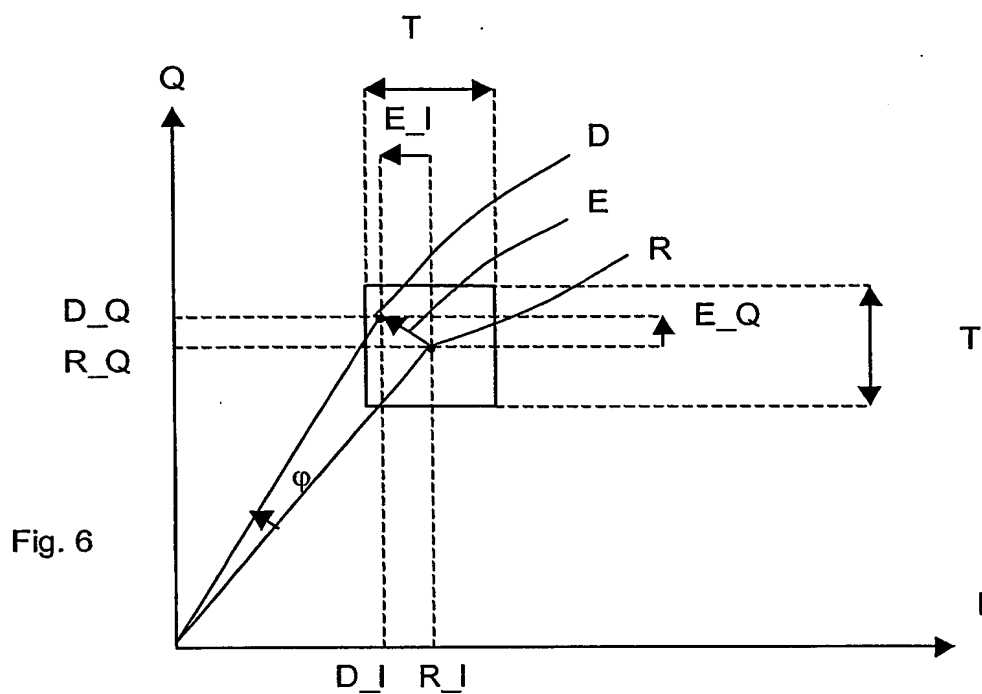


Fig. 7

5/10

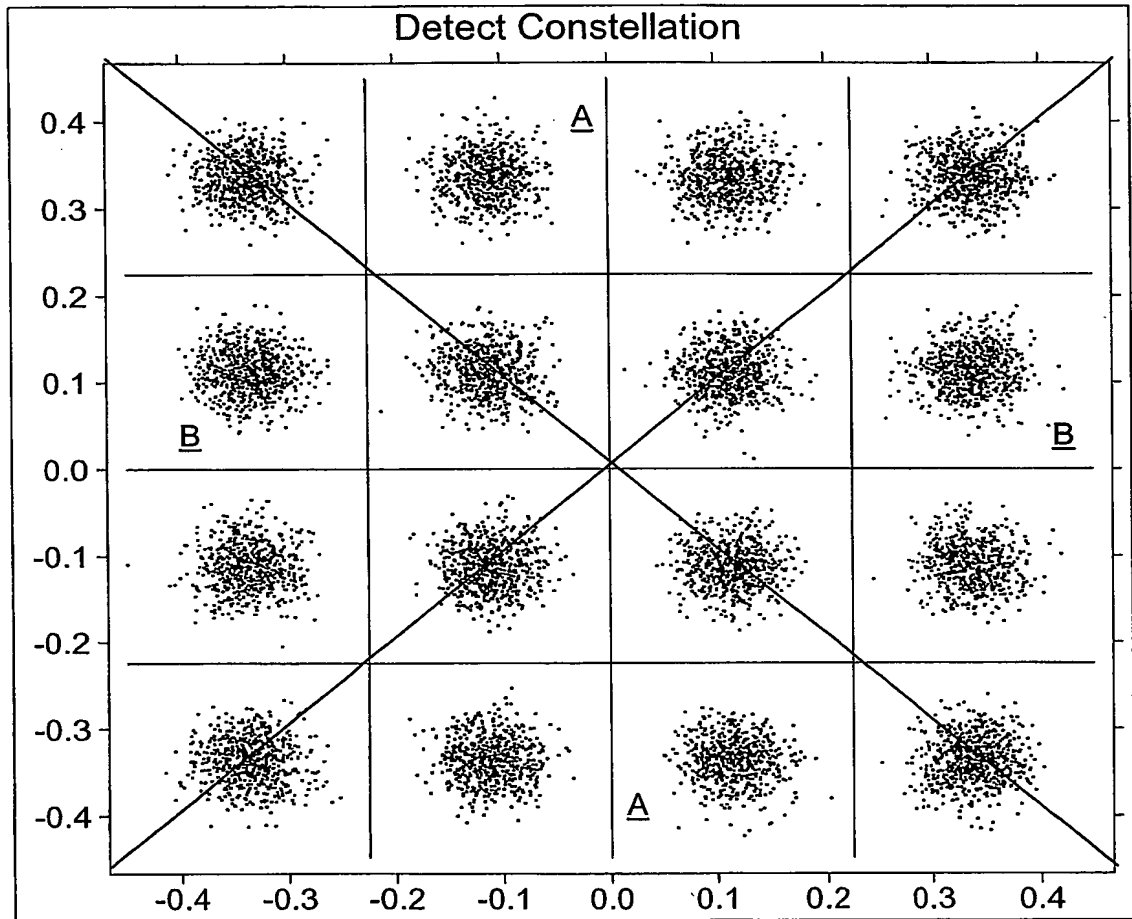


Fig. 8

6/10

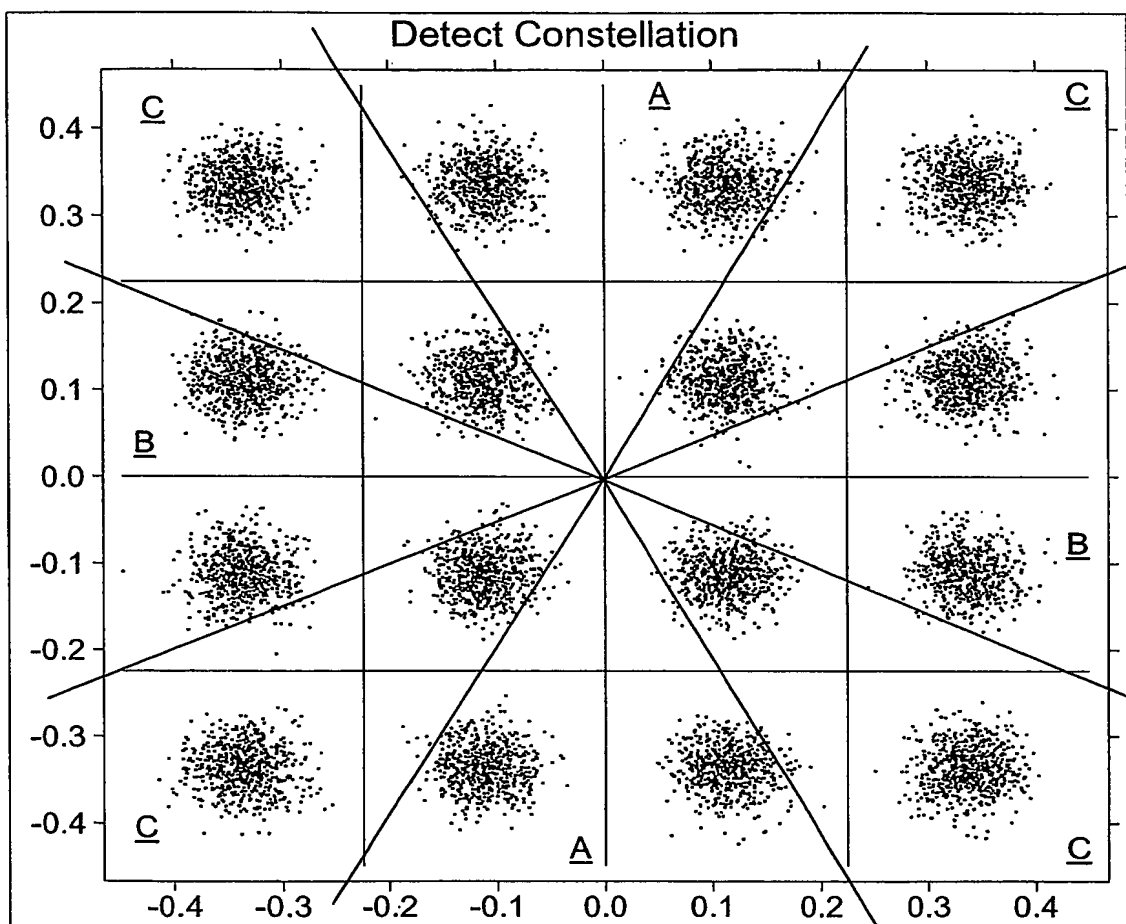


Fig. 9

7/10

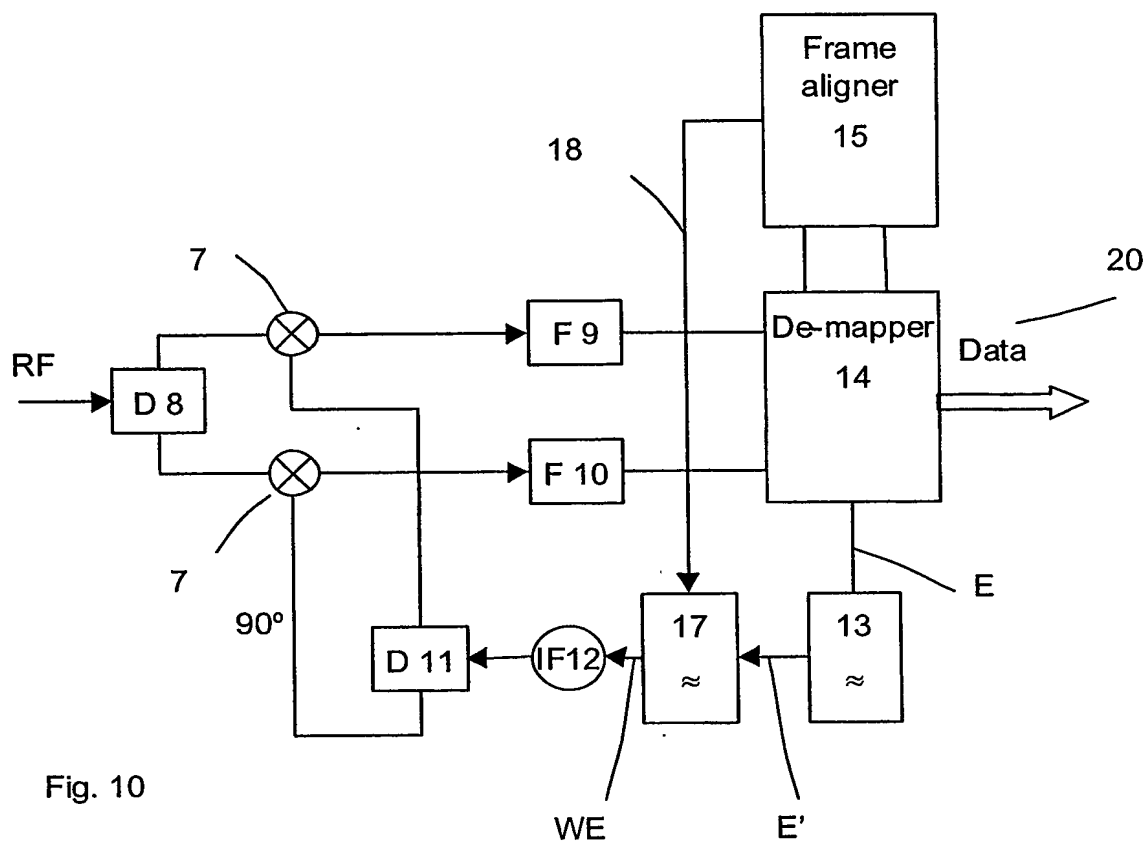


Fig. 10

8/10

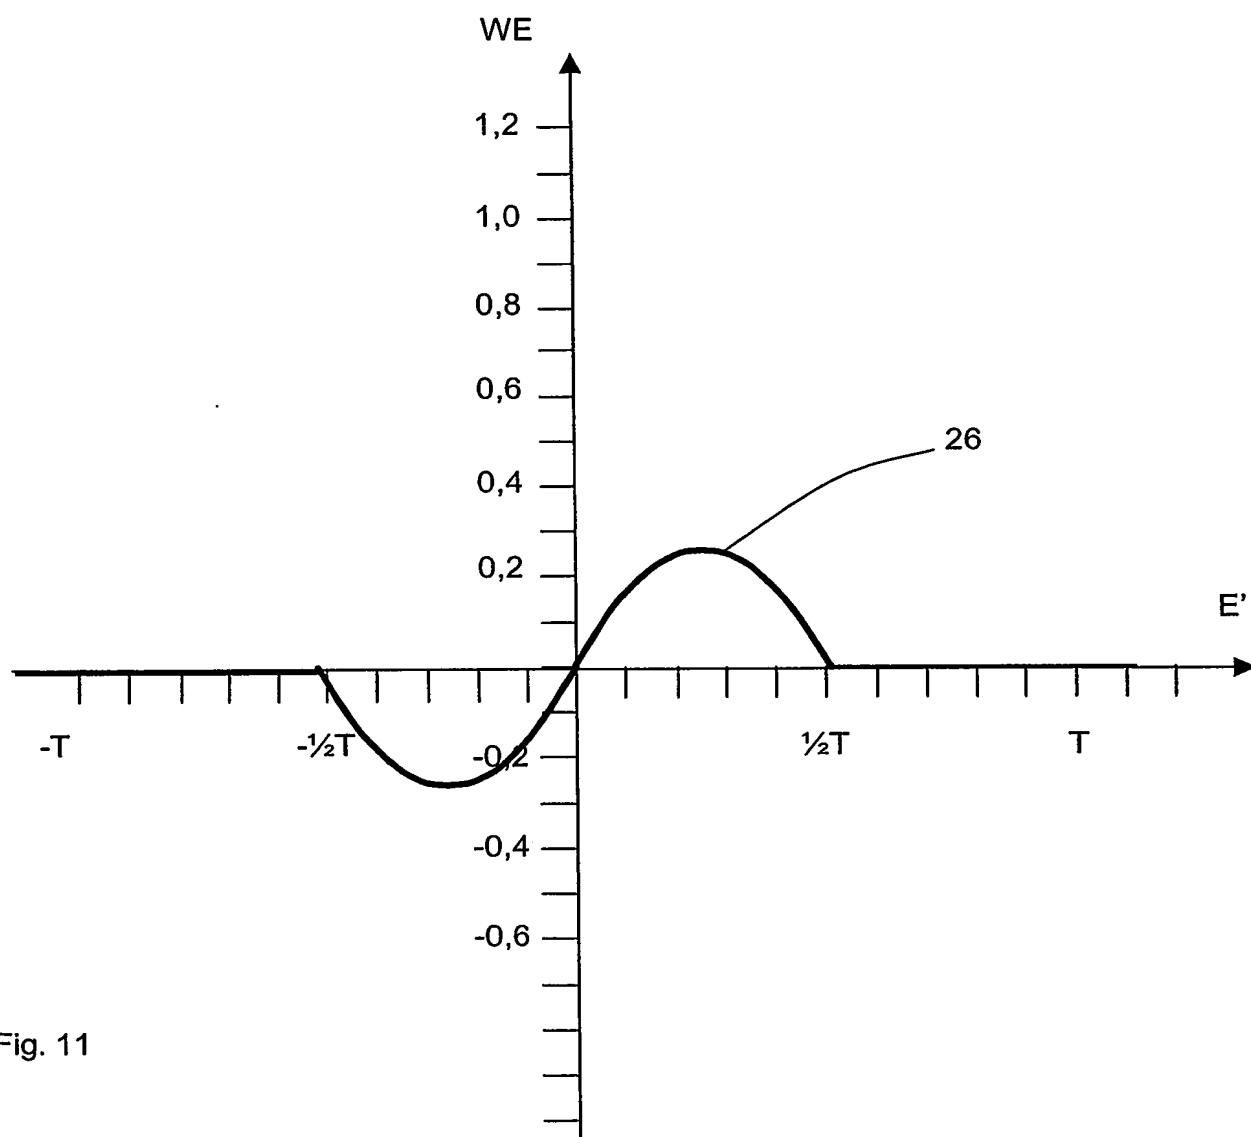


Fig. 11

9/10

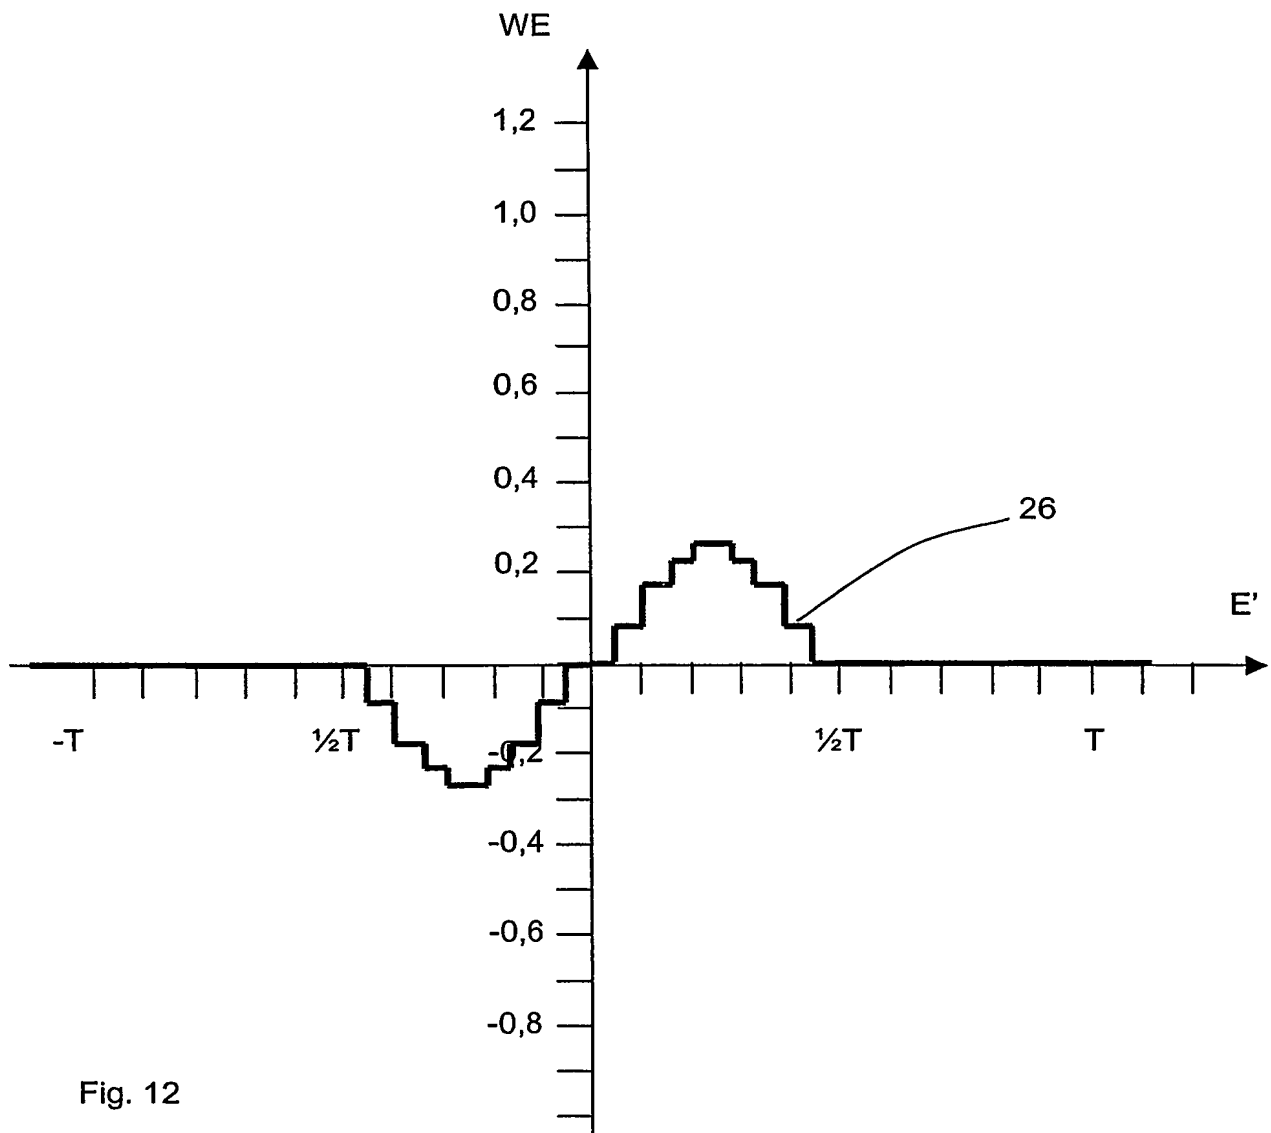


Fig. 12

10/10

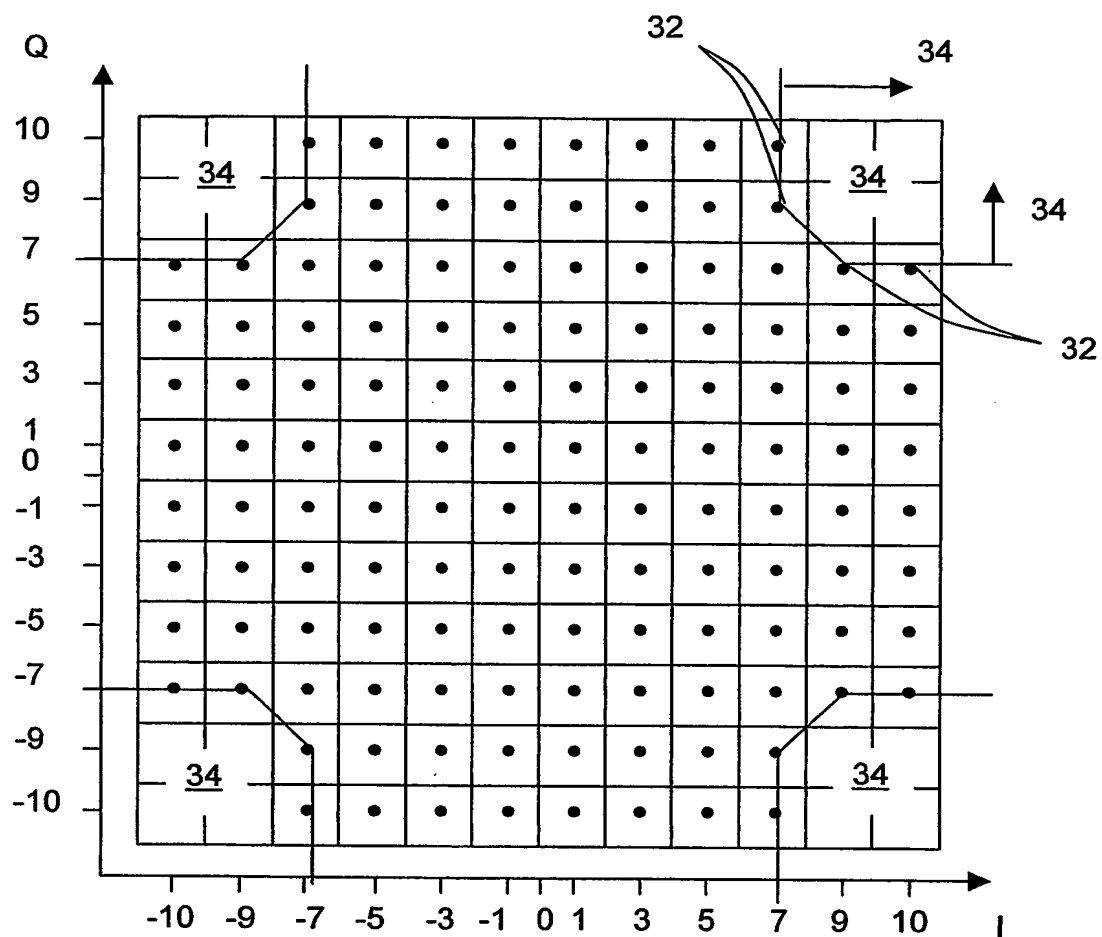


Fig. 13 -
128 QAM

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 27/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04B, H03L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5796786 A (LEE, M-H), 18 August 1998 (18.08.98), column 10, line 65 - column 11, line 4, figures 5-6C --	4-8
X	US 5684842 A (DAFFARA, F.), 4 November 1997 (04.11.97), column 5, line 54 - column 7, line 10, figure 10	4-8
A	column 3, line 39 - line 64, figure 10 --	1-3
A	US 5519356 A (GREENBERG, C.B.), 21 May 1996 (21.05.96), claim 1, abstract --	1-3

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 April 2003

Date of mailing of the international search report

14 -05- 2003

 Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

 Markus Stålö /OGU
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4683578 A (BETTS, W.L. ET AL), 28 July 1987 (28.07.87), column 2, line 40 - column 6, line 44, figures 2-4 --	1-3
A	US 5533071 A (KRISHNAMURTHY, G. ET AL), 2 July 1996 (02.07.96), claim 1, abstract --	1-3
A	US 4555790 A (BETTS, W.L. ET AL), 26 November 1985 (26.11.85), figures 1-2, abstract --	1-3
A	MOUAKI BENANI, A. et al. "COMPARISON OF CARRIER RECOVERY TECHNIQUES IN M-QAM DIGITAL COMMUNICATION SYSTEMS". In: 2000 Canadian Conference on Electrical and Computer Engineering, Halifax, NS, Canada, 07-10 March 2000, Vol. 1., pages 73-77, INSPEC Accession Number: 6691171, see the whole document. -- -----	1-3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 02/01324

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Invention I: Claims 1-3 describe a method to approximate an error signal by its imaginary component or its real component depending on in which sector the received signal is detected.

Invention II: Claims 4-8 describe a method to weight an error signal with a weighting function

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/01324

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5796786	A	18/08/98	CN	1079619 B	20/02/02
				CN	1154027 A	09/07/97
				EP	0769364 A	23/04/97
				JP	9233438 A	05/09/97
				KR	113969 Y	11/04/98
				KR	155900 B	16/11/98
US	5684842	A	04/11/97	CN	1083196 B	17/04/02
				CN	1128923 A	14/08/96
				EP	0692896 A	17/01/96
				FR	2722630 A	19/01/96
				JP	8181732 A	12/07/96
				FR	2733107 A	18/10/96
US	5519356	A	21/05/96	NONE		
US	4683578	A	28/07/87	NONE		
US	5533071	A	02/07/96	CA	2131998 A	18/08/94
				CN	1069472 B	08/08/01
				CN	1102043 A	26/04/95
				EP	0642721 A	15/03/95
				JP	7509828 T	26/10/95
				KR	158719 B	01/12/98
				US	5406587 A	11/04/95
				US	5508748 A	16/04/96
				US	5533070 A	02/07/96
US	4555790	A	26/11/85	WO	9418772 A	18/08/94
				NONE		